



# Instruction Manual



Schaffenburg


OFFICE FURNITURE

FAMILY OWNED


Wireless Charger

QiWi


## Included Parts



QiWi Charger




AC-Adapter



Sensor Template



Desk Sticker



Bracket




Cable Clips x2

# Product Introduction


The QiWi is a wireless charging device that can charge mobile phones or other electronic devices that support the Qi standard at a distance of 20~50mm (0.79"-1.97"). The charging rate is stable, and it is suitable for non-metallic desktops such as marble, wood, and glass.

It can be easily installed beneath the desktop and has a wide range of applications in scenarios such as homes, offices, hotels, and bars.

## Installation Steps




The charger does not work at a close range.  
The thickness of the work surface must be at least 20mm (0.79") and no more than 50mm (1.97").




## Step 1

Mount the bracket in your preferred position under your desk. The small hole for the adapter plug should face inward.




## Step 2

Insert the QiWi Charger into the bracket, and then connect the power supply.

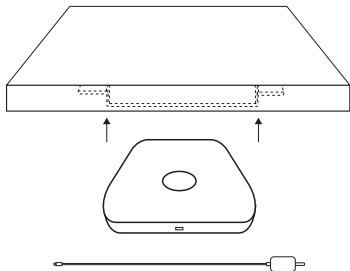


### Step 3

Place the Sensor Template on the desk in the approximate location of the charger. Move the sensor template until the sensor LEDs light up.

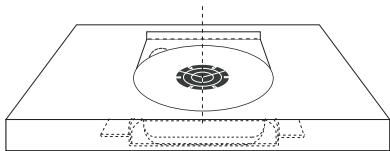


When the correct position is close, a portion of the LEDs will light up in the direction of the charger: Continue moving in the direction indicated until all 6 LEDs light up.

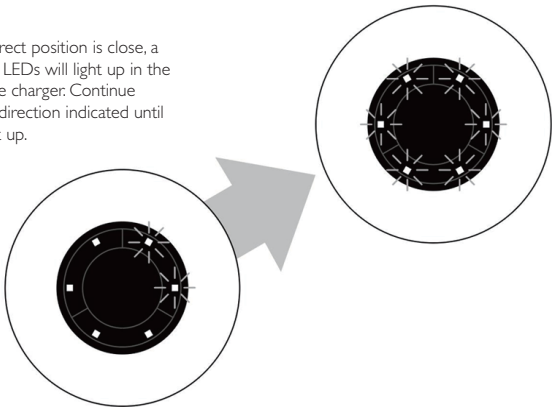


## Step 4

Remove the foil from the double-sided tape and stick it in position. Do not move the template and make sure that the LEDs remain lit.

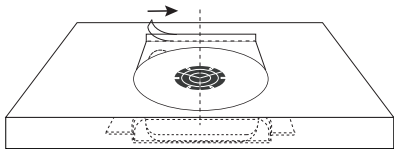


## Step 5

Remove the Sensor Template with the LEDs in the middle.

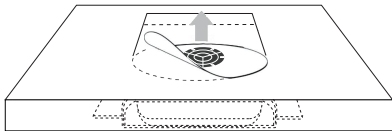

## Step 6

Stick the Desk Sticker in the hole where the Sensor Template was previously.

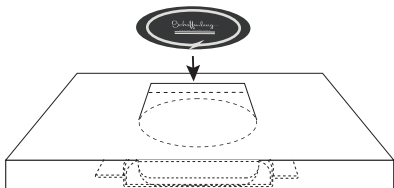


## Step 7

Remove the remains of template and the installation is complete.



## Step 8

Place your phone on the center of the Desk Sticker; and enjoy fast and convenient wireless charging.

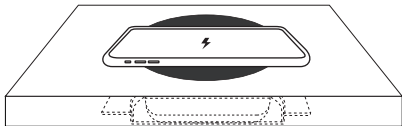

## Specifications

Input: 24V1A

Output: 10W (MAX)

Charging range: 20-50mm(0.79"-1.97")

Size: 120\*120\*15mm

Note: Please choose a non-metallic table top such as marble, wood, glass, etc., and the thickness is within 20mm - 37mm.

## Safety Tips

1. Do not pull the power cord forcefully to avoid breaking or detaching it.
2. To prevent short-circuiting and leakage, do not place the charger or any other components near fire or water sources.
3. To avoid electricity leakage due to circuit damage, do not use QiWi in severe high-temperature, humid, or corrosive environments.

## Precautions

1. To prevent damage or interference with the charger's functionality, avoid placing metallic objects or magnetic cards on the wireless charging surface.
2. If the Desk Sticker or the QiWi charger overheats or stops charging during use, please remove the charging device and wait for it to cool down before trying again.

## Product After-sales Guide

Thank you for purchasing our QiWi wireless charger. In order to ensure you get reliable after-sales service, please read the following carefully.



## FAQ

Q: Is the Desk Sticker necessary?

A: Yes, it is very necessary.

The sticker greatly extends the charging distance.

At the same time, it will improve the charging efficiency and prevent overheating.

Q: Is it important to align the Desk Sticker with the charger?

A: Yes, it is crucial.

Only when aligned can the charge work properly and efficiently.

Otherwise, it won't work, charge inefficiently or may cause overheating problems.

Please use the sensor template to assist alignment.

Q: Why does it not work when I put my phone directly on the charger?

A: The charging range is 20-50mm. Therefore it will not work below or beyond this range.

Please use the charger together with the Desk Sticker to charge within the recommended range.

Q: Can the charger work properly under a marble tabletop?

A: Yes, the charger can work properly.

It can penetrate all kinds of tabletop except metal, with a maximum thickness of 50mm.

# Warranty

The following conditions are not covered by the warranty:

1. Accessories are not covered by the warranty.
2. Failures due to improper operation or installation by the user are not covered.
3. Failures caused by disasters, man-made damage, self-disassembly, unpacking, and repairs by non-authorized maintenance centers of our company are not covered.

[www.schaffenburg.nl](http://www.schaffenburg.nl)